



# QuickStore

WRP8055 RECEIPT PRINTER



*Big Business Tools. Small Business Attitude.*

The Wasp WRP8055 receipt printer uses thermal printing technology to create high quality receipts. Easily deliver crisp, professional receipts to your customers, printed at 203 dpi print resolution. Featuring a print speed of 6 inches per second, the WRP8055 offers a compact, space-saving design, ideal for retail applications. Connect the WRP8055 directly to your PC via the USB port, for easy installation. WRP8055's durable construction provides the reliability your retail business requires.


## WKB1150 POS KEYBOARD FEATURES

- ▶ Print speed up to 6 inches per second at 203 dpi
- ▶ Direct thermal print technology
- ▶ Epson-driver compatible
- ▶ Integrated auto-cutter

## BENEFITS

- ▶ Create high quality, professional receipts
- ▶ Increase the speed of point of sale transactions
- ▶ Easy media loading allows you to quickly change receipt paper rolls
- ▶ Integrates with OPOS compliant POS Software

## OUTER DIMENSIONS

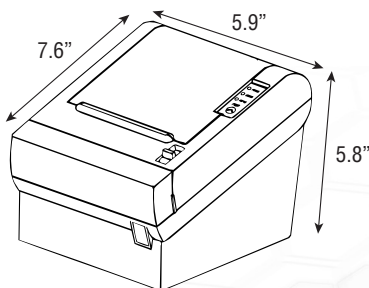

3380879

# QuickStore

WRP8055 RECEIPT PRINTER



*Big Business Tools. Small Business Attitude.*

## ■ SPECIFICATIONS

<b>PRINT</b>	Print Method	Direct Thermal
	Printing Speed	130mm/sec (5.511 IPS)
	Dot Density	203 DPI x 180 DPI
	Dot Pitch	0.141mm, 0.125mm
	Printing Width	72mm, 552 dots/line
	Characters Per Line	A=46 columns, B=61 columns
<b>PAPER</b>	Paper Type	Thermal paper/Roll type
	Paper Width	80mm ± 0.1mm
	Paper Thickness	0.06 - 0.09mm
	Paper Roll Diameter	Max. 83.0mm
	Roll Core Inner Diameter	12.5mm ± 0.5mm
	Paper Supply Method	D&P (Drop and Print) Mechanism
<b>INTERFACES</b>	Standard	USB
	Barcodes	EAN-8, EAN-13, CODE 39, CODE 93, CODE 128, UPC-A, UPC-E, CODABAR
<b>CHARACTER SET</b>	Alphanumeric Character	95
	Extended Graphic	128 x 7 page (1 space page)
	International Character	32
<b>EMULATION</b>	ESC/POS Command Compatible	TM-T88 (II), TSP552 (II), CBM233
<b>ENVIRONMENTAL</b>	Operating Temperature	5 to 40°C
	Storage Temperature	-20 to 60°C
	Relative Humidity	35 to 85%, 10 to 90% (storage)
	Safety Certification	FCC-Class A, UL, cUL

## ■ SPECIFICATIONS

<b>DRIVER</b>	Driver	Epson® driver compatible or generic text
<b>POWER SUPPLY</b>	External Adapter	AC 100V ~ 250V, 50/60Hz
<b>AUTO CUTTER</b>	Type	Guillotine
	Life	300,000 cuts
<b>PAPER</b>	Paper Thickness	0.06 - 0.09mm
	Cutting Method	Full/Partial Cut