


SUPER PREMIUM RESIN FOR FLAT HEAD PRINTERS


EXCELLENT PRINTING QUALITY ON TEXTILE MATERIALS


EXCELLENT RESISTANCE
TO WASHES AND DRY CLEANING

VERY GOOD RESISTANCE TO IRONING

AXR®9 is a resin ribbon designed for the textile label printing market. It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

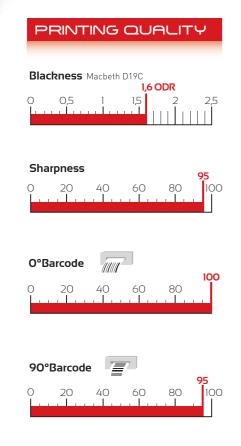

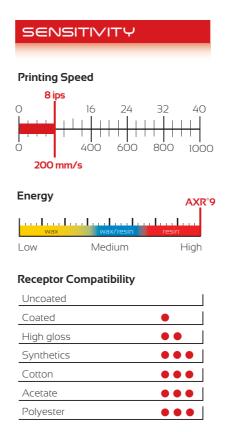

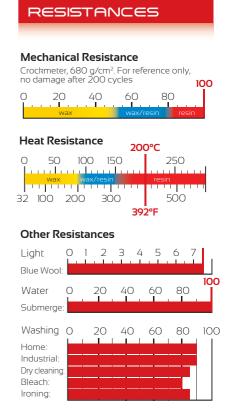






















SUPER PREMIUM RESIN FOR FLAT HEAD PRINTERS

APPLICATION FIELDS

The characteristics of AXR®9 answer the requirements of the following application fields:

(If your application is not among the ones below, please contact us.)



RIBBON SPECIFICATIONS

Backcoating:

Silicon based. Friction coefficient: Kd < 0.2.

Ink:

Resin. Melting point: 85°C / 185°F (ARMOR procedure).

PET film:

Thickness: 4.5 µm.



Storage:

12 months, 5-35°C (40-95°F), 20-80 % Humidity Rate.

Ribbon:

Thickness (black): < 8 µm. The ribbon is anti static build-up

CERTIFICATIONS

REACH / SVHC Free: 1907/2006/EC

Heavy metals: - 2002/95/EC

- 2002/96/EC

- 2011/65/EC

California Proposition 65

Halogen Free



OLOUR RANGE



SUSTAINABLE DEVELOPMENT

ARMOR evaluation of AXR®9:

To be compared with our other products.

Environment

Economy

The film is produced in one of the industry's most organised and awarded factories:

Quality, health, safety and environment certifications: 150 9001: 2008 OHSAS 18001: 2007

ISO 14001: 2004 ISO 50001: 2011



Responsible Care: International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



Global Compact: UN initiative inviting companies to apply fundamental ethical and environmental values.



