

NET330 Near-Edge Resin

High Durability for Flexible Packaging



Food/Beverage



Health/Beauty



Medical



Pharmaceutical



Retail

Benefits

- High performance in Markem, Videojet, and other TTO Printers
- Easy to use - No printer adjustments needed for most print formats
- Doesn't smear or rub off in the packaging process, even with hot fill
- No image ghosting - heat resistance up to 500°F required for lid sealing
- Withstands water and oils associated food production
- Withstands chemicals like isopropyl alcohol, bleach, and more
- Anti-static formula and unique backcoat protects the printhead

Recommended Stocks

Flexible Packaging Films

- PP / Polypropylene
- PE / Polyethylene
- PET / Polyester

Applications

- Bakery foods
- Coffee
- Flexible packaging
- Frozen meats/meals
- Frozen vegetables
- Hot fill
- Meat, poultry, seafood
- Nuts
- Prepared Foods
- Pet Food and Treats
- Tray Lids
- Medical Devices
- Pharmaceutical
- Pill packs

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW200	GP725 High Mark DC100	PM308 Prime Mark DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NET330

Technical Specifications

Color Code Tab Metallic Blue
 Film Thickness 4 Microns
 Total Ribbon Thickness 6.3 Microns
 Transmission Density 1.0 MacBeth Scale
 Ink Melting Point 150°C / 302°F

Imaging Characteristics

Printhead Near-Edge
 Max Print Speed 16 IPS
 Image Darkness 2.0 RD (densitometer)
 Heat Resistance 260°C / 500°F


Compliance

- REACH – SVHC Free
- RoHS/WEEE
- California Proposition 65
- FDA 21CFR175
- ISEGA Approved
- Additional Regulatory Requirements Upon Request

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

Performance Ratings

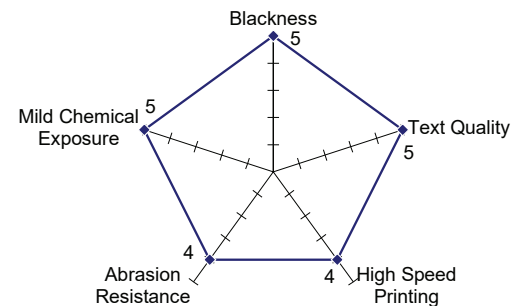

310 Commerce Drive • Amherst, NY 14228
 Toll-Free: 888.464.4625 • Phone: 716.691.6333
salesinfo@iimak.com • www.iimak.com