



# SRP-E770III

4 inch Direct Thermal

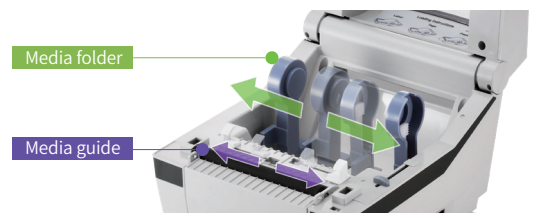

# Economic and Compact

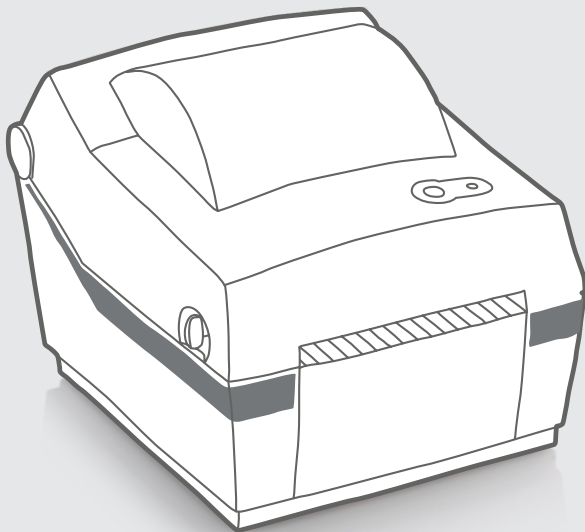

### Basic Functions

- Printing speed up to 5 ips (127 mm/s)
- Fast data processing speed for various types of label
- The SRP-E770III is fully compatible with market-leading programming languages; SLCS, BPL-Z™, BPL-E™
- Smart switch programming language without setting the mode

### User-Friendly Design

- Standard Interface : USB  
Optional Interface : USB + Serial  
USB + Ethernet
- Compatible with label design software; BIXOLON's Label Artist™, Seagull's BarTender® and BarTender® UltraLite for BIXOLON
- Easy media loading with adjustable media width guide and folder
- Optional Peeler
- Various mode set ups via button confirmed by visual LED

# SRP-E770III

4 inch Direct Thermal

## Specifications

### Printer Specifications

**Print Method**

Direct Thermal

**Print Speed**

Up to 5 ips (127 mm/sec)

**Print Resolution**

203 dpi

**Print Width**

Up to 104 mm

**Print Length**

Up to 1,000 mm

**Sensor**

Transmissive, Reflective, Head open

### Media Characteristics

**Media Type**

Gap, Black Mark, Notch, Continuous, Fan-Fold

**Media Width**

42 ~ 106 mm

**Media Roll Diameter**

Up to 130 mm

**Media Thickness**

0.06 ~ 0.20 mm

**Supply Method**

Easy Paper Loading

### Physical Characteristics

**Dimensions (WxDxH)**

189 x 221 x 171 mm

(7.44 x 8.70 x 6.73 inch)

**Weight**

1.47kg (3.24 lbs.)

**Power**

EnergyStar Certified,

External Power Adaptor 100-240V AC, 50/60Hz

### Performance Characteristics

**Memory**

64 MB SDRAM, 128 MB Flash

**Interface Options**

Standard:USB

Optional: ① USB + Serial

② USB + Ethernet

### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

### Software

**Emulation**

SLCS, BPL-Z™, BPL-E™

**Driver / Utility**

Windows Driver (Euro Plus/Seagull),

OPOS Driver, Linux / Mac CUPS Driver,

Virtual COM USB/Ethernet Driver,

Utility Program, Label Artist-II, Bartender UL

**SDKs**

iOS SDK, Android SDK, Windows SDK,

Linux SDK

### Fonts / Graphics / Symbologies

**Fonts**

- 10 SLCS Resident Bitmap Fonts
- One SLCS Resident Scalable Font
- 16 BPL-Z™ Resident Bitmap Fonts
- One BPL-Z™ Resident Scalable Font
- 5 BPL-E™ Resident Bitmap Fonts
- 23 Code Page
- Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

**Graphics**

Supporting user-defined fonts, graphics, formats, and logos

**Barcode Symbologies**

1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB

2D: Aztec, Codablock, Code49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR Code, TLC39

### Options

Peeler



BR-SRP-E770III-EN-JUL18-V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

**BIXOLON**®

**BIXOLON Co.,Ltd.**  
+82 (0) 31 218 5500  
sales@bixolon.com

**BIXOLON America Inc.**  
+1 858 764 4580  
sales@bixolonusa.com

**BIXOLON Europe GmbH**  
+49 211 68 78 54 0  
sales@bixolon.de

www.Bixolon.com

