




> Wallcharger System for PDA 19" Racksolution

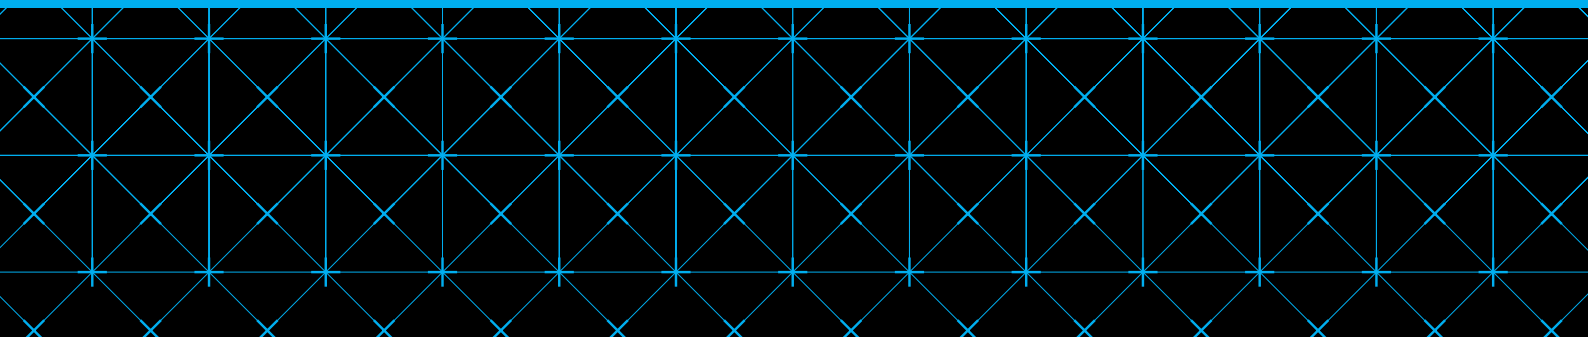

Technical Information

General Information

19" Rack size

High	1941mm (41U)
Wide	514mm
Deep (mounting size bottom plate)	514x398mm
Charging slot per 19" plate	4 Slots
Max Charging slot per rack	4-48 Charging slots per 19" rack
Warrenty	2-years, Option 3-5 years
Approval	CE /

Technical Information

Input power	100-240VAC Power-supplay
Output power	DC 5V2,5A per charger slot. (Totally 10A)
Charging time	Normally 1-3 hours
Power supplay unit;PSU	1 PSU per 19" rack (supplying 4 Charger-slot)
Connectors	Open-ends, EURO-plug, UK-Plug, US-Plug

Packing and Order Information

How to order Wallcharger system?

1. Please order totally QTY of rack
2. Order QTY of each 4-Chargerslots 19" plate
3. Order QTY of blindplate if you not fillup the 19" Rack



Order Information

P/N	Type	For device type	Charger slots	Other
3440-1500	4-Chargerslots 19" Plate	Motorola TC55	4-48	Max.12 19"plate per rack
3440-1400	4-Chargerslots 19" Plate	Motorola MC45	4-48	Max.12 19"plate per rack
3440-1600	4-Chargerslots 19" Plate	Motorola MC55/65/67	4-24	Max 6 19"plate per rack
3440-1900	4-Chargerslots 19" Plate	Motorola MC70/75	4-24	Max 6 19"plate per rack
3450-1100	4-Chargerslots 19" Plate	Intermec CN3/CN4	4-24	Max 6 19"plate per rack
3450-1200	4-Chargerslots 19" Plate	Intermec CN50/CN51	4-24	Max 6 19"plate per rack
3450-1300	4-Chargerslots 19" Plate	Intermec CN70/70e	4-24	Max 6 19"plate per rack
SRC00080102011	19" Rack for floor mount			
TBD	19" Rack for floor and Wall mount			
TBD	19" Blind plate			

Cradle of Sweden develops and manufactures products and solutions for stationary and vehicle mounted charging of PDAs, as well as solutions for communication between PDAs, vehicles and surroundings within complex mobile data systems.

