




# WallCharger System for PDA 5-Slot solutions

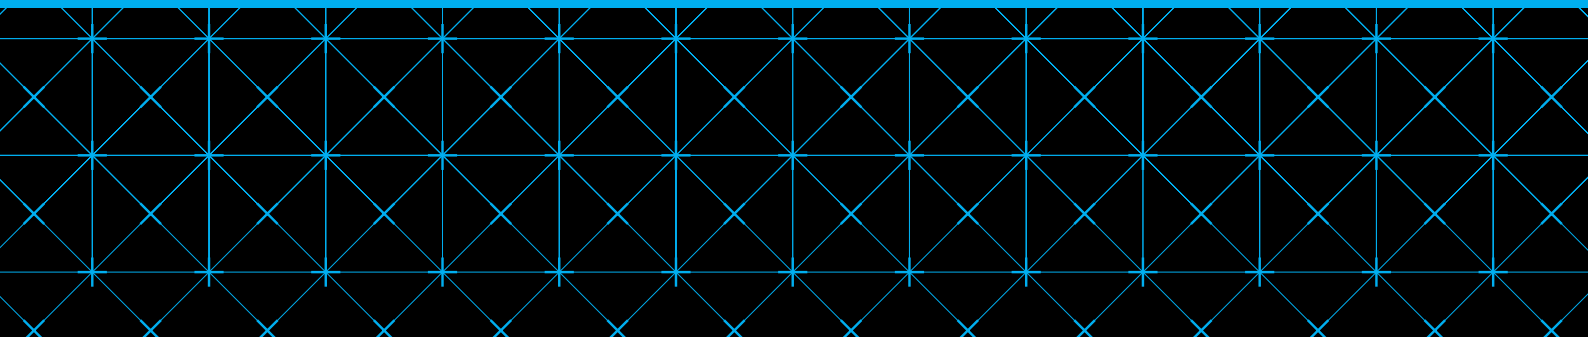

# Technical Information

## General Information

Wall Charger size	5-Slot
Length:	485 mm ( for 19" rack wide )
Width /Deep:	120 mm
Height:	270 mm
Weight:	3,5 kg

## Charger Slots

Input power:	12V5A
Output power per slot:	max 5VDC2.1A normally 5VDC 0,4-1,2A
Charging time:	Normally 1-4 hours, PDA Dependant
Warranty:	1-years, Option 2-5 years
Approval:	CE / RoHs / US FCC / UL on request

## Order Information

For device	5-Slot
ZEBRA TC20	4540-2300
ZEBRA TC51/56 BOOT	4540-2100
ZEBRA TC51/56 NoBOOT	4540-2200
ZEBRA TC52/57 BOOT	4540-2500
ZEBRA TC52/57 NoBOOT	4540-2600
Honeywell EDA50	4550-1500
Honeywell EDA50K	TBD
Honeywell EDA51*	4550-1700
Honeywell CT40 BOOT*	4550-1600
Honeywell CT40 NoBOOT	4550-1900
Honeywell CT50/60	4550-1400
Honeywell Captuvo SL42H	4550-1800
Samsung Xcover 4* ( Micro-USB )	45000-1100
Samsung Xcover 4S* ( USB-C )	4500-1200

\*For charger to EDA51,Samsung Xcover4/4S please order MOBILIS bumper case separately. For CT40 BOOT Charger, please contact us for more information about the modification of the Rubber bumper case, PN: CT40-RB-00.

## Accessory / PSU Adapter

PSU Adapter EU/UK/US 12V5A	160-005-125
Mounting bracket kit for ELFA wall bracket ( 2 pcs per kit/plate Left/Right )	160-100-062

## Powercord for PSU ADAPTER (160-005-125) to 4,6 and 8-SLOTS Charger IEC60320 C5 (Power Cord is not included, order separately)

Power cord 1,5m EU Plug	160-005-EU
Power cord 1,5m UK Plug	160-005-UK
Power cord 1,5m US Plug	160-005-US

Cradle of Sweden develops and manufactures products and solutions for stationary and vehicle mounted charging of PDAs, as well as solutions for communication between PDAs, vehicles and surroundings within complex mobile data systems.