



**55" Open Frame PCAP interactive large format display with 15pt touch capability, IPS panel technology and touch through glass function for landscape, portrait or face up use**

The 4K UHD (3840x2160) Open Frame TF5539UHSC-B1AG with Touch-Through-Glass function guarantees a seamless and accurate touch response for true kiosk integration or interactive behind-glass-retail applications. The IPS panel technology offers exceptional colour performance and wide viewing angles, making it a perfect solution for interactive shop windows, education, kiosks and in-store communications. Featuring a metal housing with 60950-1 ball-drop proof, scratch-resistant and edge-to-edge glass, this display can be installed in the most demanding environments for an 24/7 usage and in different set-ups as a result of its Open Frame side mounting holes. For ease of integration, the TF5539UHSC-B1AG can be equipped with optional external mounting brackets ([OMK4-2](#)) making it an ideal solution for kiosk integrators and interactive multimedia.

Available also in white : [ProLite TF5539UHSC-W1AG](#)



**IPS Technology**

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



**Touch through-glass**

This through glass touch screen works right through glass and can turn glass surfaces into an interactive touch screen display. Use it on storefront windows, real estate office, in-store for POS or restaurants.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	Edge to edge glass, Open Frame
<b>Diagonal</b>	55", 139cm
<b>Panel</b>	IPS LED, AG coated glass
<b>Native resolution</b>	3840 x 2160 @60Hz (8.3 megapixel 4K UHD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	500 cd/m <sup>2</sup>
<b>Light transmittance</b>	84%
<b>Static contrast</b>	1100:1
<b>Response time (GTG)</b>	8ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	16.7mIn 8bit
<b>Horizontal Sync</b>	30 - 83kHz
<b>Viewable area W x H</b>	1212 x 683mm, 47.7 x 26.89"
<b>Bezel width (sides, top, bottom)</b>	29.7mm, 33.2mm, 33.2mm
<b>Pixel pitch</b>	0.315mm
<b>Bezel colour and finish</b>	black, matte

## 02 TOUCH

<b>Touch technology</b>	projective capacitive
<b>Touch points</b>	15 (HID, only with supported OS)
<b>Touch accuracy</b>	+/- 3mm
<b>Touch method</b>	stylus, finger, glove (latex)
<b>Touch interface</b>	USB
<b>Supported operating systems</b>	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
<b>Through-Glass</b>	6mm
<b>Palm rejection</b>	yes

## 03 INTERFACES / CONNECTORS / CONTROLS

<b>Analog signal input</b>	VGA x1 (max. 1920x1080 @60Hz)
<b>Digital signal input</b>	HDMI x2 (v.2.0 x1 max. 3840x2160 @60Hz, v.1.4 x1 max. 3840x2160 @30Hz) DisplayPort x1 (v.1.2 max. 3840x2160 @60Hz)
<b>Audio input</b>	Mini jack x1
<b>Monitor control input</b>	RS-232c x1 RJ45 (LAN) x1
<b>Audio output</b>	Mini jack x1 Speakers 2 x 8W
<b>HDCP</b>	yes

## 04 FEATURES

<b>Extra</b>	handles, touch through-glass, temperature sensor with fan control
<b>Max. non-stop operating time</b>	24/7
<b>Anti image retention</b>	yes
<b>Glass thickness</b>	4mm

Glass hardness	7H
60950 Ball drop test	yes
Water and dust protection	IP54 (front)
Housing (bezel)	metal

## 05 GENERAL

OSD languages	EN, DE, FR, ES, IT, RU, NL, PL
Control buttons	power, menu, exit, up, down
User controls	picture (backlight, contrast, brightness, sharpness, H/V-position, phase, Chroma, adjust screen, colour temp., picture mode), sound (treble, bass, balance, volume, mute, speaker, audio source), screen (aspect, Touch feature, reset), settings (OSD time, OSD H/V position, language, schedule, power save, control setting, network setting, advanced, information, all reset)
Plug&Play	DDC2B

## 06 MECHANICAL

Orientation	landscape, portrait, face-up
VESA mounting	600 x 400mm
Mini PC mount	VESA 100 x 100, NUC INTEL
Operation temperature range	0°C - 40°C
Storage temperature range	- 20°C - 60°C
MTBF	50000 hours (excluding backlight)

## 07 ACCESSORIES INCLUDED

Cables	power, USB, HDMI, DP
Guides	quick start guide, safety guide
Cable cover	yes

## 08 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	155W typical, 1.5W stand by, 0.3W off mode

## 09 SUSTAINABILITY

Regulations	CE, EAC, RoHS support, ErP, WEEE, cULus, REACH, UKCA
Energy efficiency class (Regulation (EU) 2017/1369)	G
REACH SVHC	above 0.1%: Lead

## 10 DIMENSIONS / WEIGHT

Product dimensions W x H x D	1271.5 x 749.4 x 68mm
Box dimensions W x H x D	1400 x 930 x 245mm
Weight (without box)	41kg
Weight (with box)	46.5kg
EAN code	4948570118069

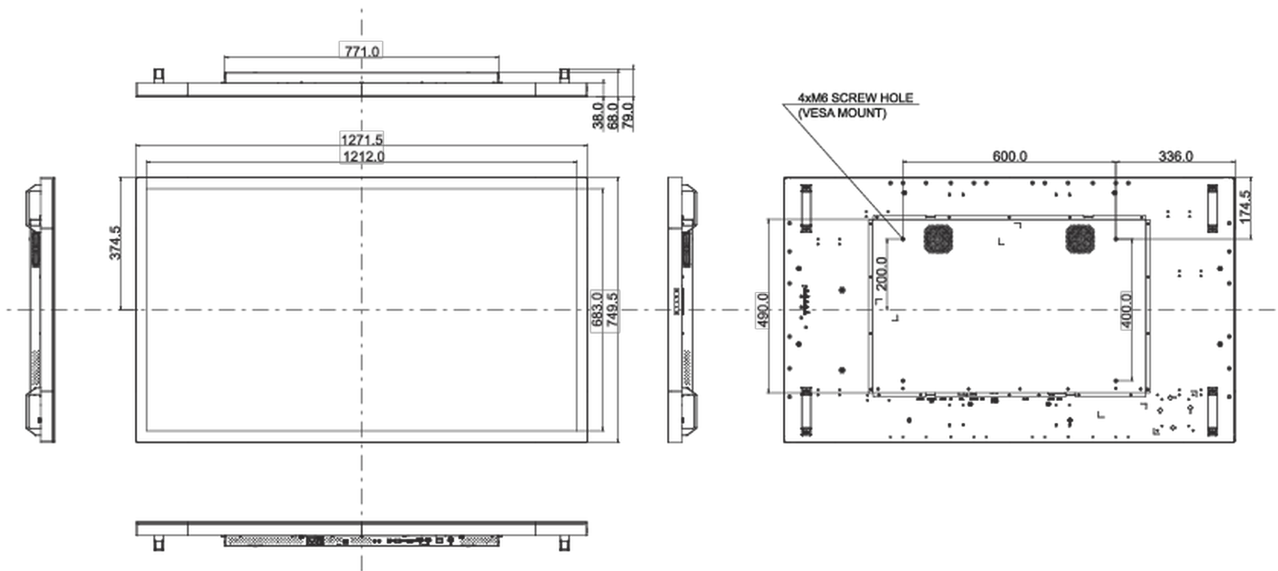

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED