

LCD 150



4:3
DISPLAY



CAPACITIVE
MULTI-TOUCH



INTEGRATED*
CUSTOMER
DISPLAY



DALLAS*
READER



MSR*
READER



IP65

CONFIGURATIONS



LCD150

LCD 150

LCD	15" LED
Luminosity	300 nits
REsolution	1024 x 768
Touch Screen	PCAP Touch
View angle	0° ~ 90°

INPUT / OUTPUT

USB	1x USB 2.0 (Type A)
	1x USB 2.0 (Type B to PC)
VGA	1x DB15
On/off button	2 (Power, Auto) + LED

POWER

Power supply	36W / 12V
DC Jack	1x 2 pin

OPTIONS

MSR	3-Track MSR (USB)
iButton	iButton (USB)
Customer display	LCM display 2 x 20 c. (USB)

CERTIFICAT

EMC & Security	FCC Class A, CE Mark, LVD
----------------	---------------------------

ENVIRONNEMENT

Operating temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Humidity	20% ~ 85% RH without condensation

DIMENSIONS



360 x 218 x 250 to 339 mm

WEIGHT

4,34 kg

VESA

VESA Mount 100 x 100

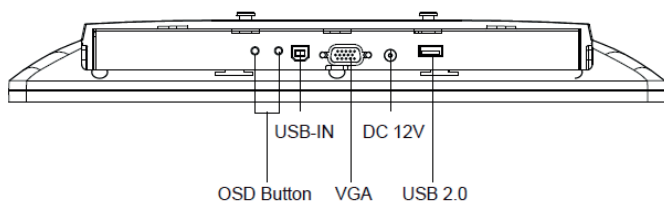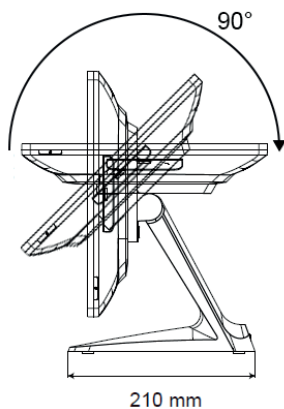

Specifications are subject to change without notice. © OXHOO 2020



LCD 170



4:3
DISPLAY


CAPACITIVE
MULTI-TOUCH


INTEGRATED*
CUSTOMER
DISPLAY


DALLAS*
READER


MSR*
READER


IP65

CONFIGURATIONS



LCD170

LCD 150

LCD	17" LED
Luminosity	300 nits
REsolution	1280 x 1024
Touch Screen	PCAP Touch
View angle	0° ~ 90°

INPUT / OUTPUT

USB	1x USB 2.0 (Type A) 1x USB 2.0 (Type B to PC)
VGA	1x DB15
On/off button	2 (Power, Auto) + LED

POWER

Power supply	36W / 12V
DC Jack	1x 2 pin

OPTIONS

MSR	3-Track MSR (USB)
iButton	iButton (USB)
Customer display	LCM display 2 x 20 c. (USB)

CERTIFICAT

EMC & Security	FCC Class A, CE Mark, LVD
----------------	---------------------------

ENVIRONNEMENT

Operating temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Humidity	20% ~ 85% RH without condensation

DIMENSIONS



360 x 218 x 250 to 339 mm

WEIGHT

4,34 kg

VESA

VESA Mount 100 x 100

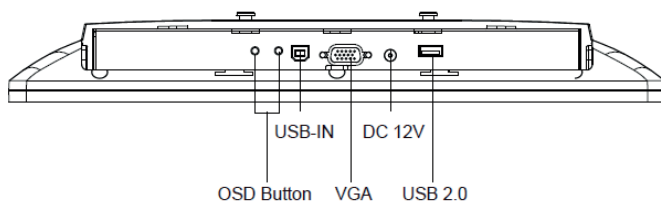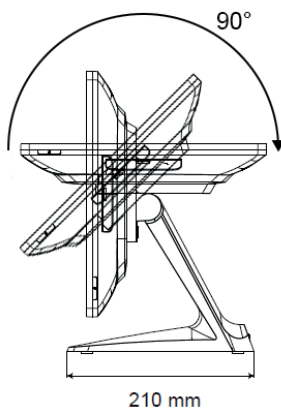

Specifications are subject to change without notice. © OXHOO 2020

