

ViewSonic® COMMERCIAL DISPLAY

CDE5520


Key Features

- Slim, even bezel and chassis
- USB playback photos, music & video
- Easy multi-screen setups
- Remote configuration and content management
- Multiple HDMI devices control



Product Description

The ViewSonic® CDE5520 is a 55" presentation display with a slim, even bezel, offering the combination of cost-efficiency and ease of installation for corporate, retail and hospitality environments. This reliable presentation display is equipped with a quad-core processor, internal memory, and dual 10W speakers, allowing constant multimedia play from internal storage or a USB flash drive. Supporting a USB-programmable hospitality setting, remote configuration, and content management systems, each display will have the same customized default and content in the same hotel or shop. Versatile connectivity options include 2 HDMI-IN ports, RS232 input, SPDIF output etc. Allowing 1080p content to be streamed from mobile devices, ViewSonic® CDE5520 is also suitable for meeting application.

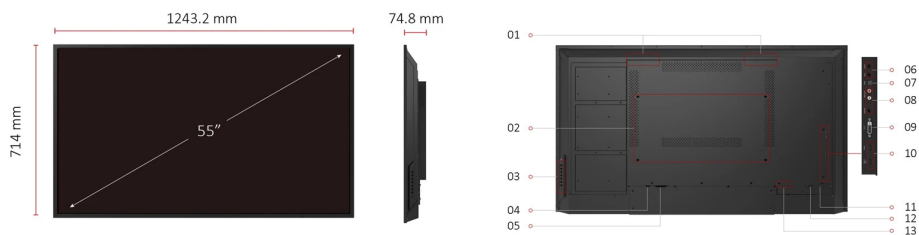

- | | |
|---|------------------------|
| 1. Internal Speakers | 7. SPDIF |
| 2. VESA® Compatible Wall Mount
400x400mm | 8. Audio In/Out |
| 3. Menu Controls | 9. DVI-D In |
| 4. Power Switch | 10. HDMI 2.0 In(x2) |
| 5. AC In | 11. RS232 In |
| 6. IR In/Out | 12. LAN |
| | 13. USB 2.0 Type A(x2) |

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	55"
Type/ Tech:	"TFT LCD Module. IPS type, DLED backlight"
Display Area (mm):	1209.6 (H) x 680.4 (V) (55" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07B colors
Brightness:	400 nits (typ.)
Contrast Ratio:	1200:1 Typ.
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours Min
Surface Treatment:	Anti-Glare, 2H, Haze 3%
Bezel:	Slim
Orientation:	Landscape

INPUT

HDMI:	x2
DVI:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
IR Pass Thru:	x1

OUTPUT

Audio:	x1 (RCA)
SPDIF:	x1 (Fiber)
IR Pass Thru:	x1

LAN

RJ45:	x1
-------	----

USB

Type A:	2.0 Type A : x2 (USB Playback)
---------	--------------------------------

SPEAKERS

SPEAKERS:	10Wx2
-----------	-------

COMPATIBILITY

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p,720p,1080i,1080p, 4K2K@60Hz
DVI:	480i, 480p,720p,1080i,1080p
Android Version:	Android 8.0

POWER

Voltage:	100-240 VAC +/- 10% Wide Range
Consumption:	Normal 100 W, Max 114.5 W

ERGONOMICS

Wall Mount (VESA®):	400x200 mm
---------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	48.94 x 28.11 x 2.94 in/1243.2 x 714 x 74.8 mm
Packaging (inch / mm):	55.90 x 35.83 x 9.65 in/1420 x 910 x 245 mm

WEIGHT

Net (lb / kg):	16.8 kg / 37.04 lbs
Gross (lb / kg):	23.95 kg / 52.8 lbs

REGULATIONS

REGULATIONS:	cULus, FCC, Energy Star, TUV Mexico, Mexico Energy, CE, CB, RoHS, ErP, REACH, EEL, WEEE, RCM
--------------	--

PACKAGE CONTENTS

PACKAGE CONTENTS:	1. CDE5520 presentation display, 2. Remote Control with batteries, 4. Quick Start Guide, 5. Power Cables (1.8M), 6. HDMI cable (1.8M), 7. RS232 cable (1.8M)
-------------------	--