



# COMMERCIAL DISPLAY CDE7520

## Key Features

- Easy cast function
- Wireless presentation across devices and rooms
- USB flash drive plug-and-play for photos, music & video
- Multitasking with powerful embedded player & OPS PC slot
- 4K slim bezel presentation display




## Product Description

The ViewSonic® CDE7520 is a 75" 4K wireless presentation display. The built-in screen sharing software\*, ViewBoard® Cast and Display, myViewBoard enable multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming the CDE7520 into a dynamic content hub. This reliable presentation display is equipped with a quad-core processor and internal memory, allowing constant multimedia play from internal storage or a USB flash drive. Supporting remote configuration and content management systems, the ViewSonic® CDE7520 is also suitable for diverse signage applications.

\*Chrome, Android, Windows, Mac OS, and iOS compliant

\*Miracast, Chromecast, and AirPlay support

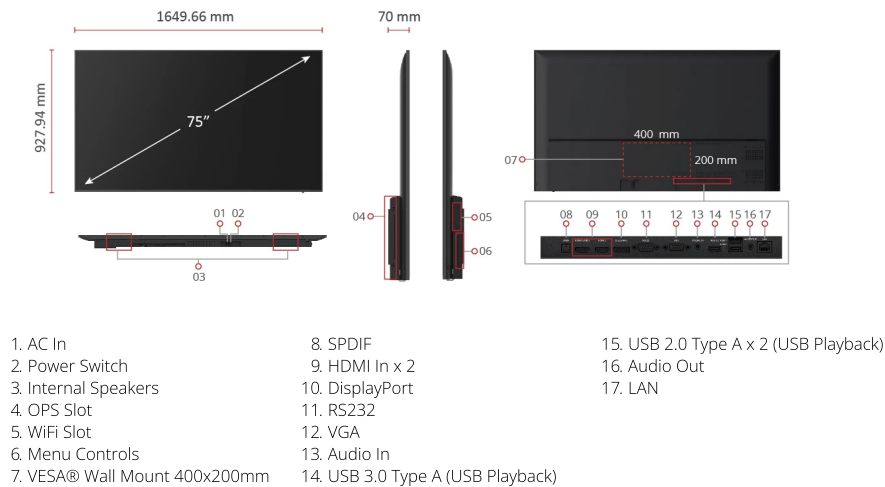

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

Panel Size:	75"
Type/ Tech:	TFT LCD Module. IPS type, DLED backlight
Display Area (mm):	1649.664(H) × 927.936(V) (75" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G colors
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 Typ. , 5000:1 Max.(DCR enable)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (min)
Surface Treatment:	Anti-glare, 3H hardness, Haze 25%
Bezel:	Slim
Orientation:	Landscape

**INPUT**

HDMI:	x2
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
OPS Slot:	x1 (Optional Intel OPS VPC12-WPO)
WiFi Slot:	x1

**OUTPUT**

Audio:	x1 (3.5mm)
SPDIF:	x1 (Fiber)

**LAN**

RJ45:	x1
-------	----

**USB**

Type A:	2.0 Type A : x 2 (USB Playback), 3.0 Type A : x 1 (USB Playback)
---------	--

**SPEAKERS**

SPEAKERS:	Max. 16Wx2
-----------	------------

**COMPATIBILITY**

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
DisplayPort:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
Android Version:	Android 8.0

**POWER**

Voltage:	100V-240V, 50/60Hz (AC)
Consumption:	Normal 107 W

**ERGONOMICS**

Wall Mount (VESA®):	400x200 mm
---------------------	------------

**OPERATING CONDITIONS**

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non-condensing

**DIMENSIONS (W X H X D)**

Physical (inch / mm):	65.83 x 37.59 x 2.76 in/ 1672.0 x 955.0 x 70.0 mm
Packaging (inch / mm):	71.97 x 43.23 x 8.66 in/1828 x 1098 x 220 mm

**WEIGHT**

Net (lb / kg):	29.30 kg / 64.60 lbs (w/o stand)
Gross (lb / kg):	41.7 kg/91.93 lbs

**REGULATIONS**

REGULATIONS:	cULus, FCC, Energy Star, EPEAT, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS
--------------	--

**PACKAGE CONTENTS**

PACKAGE CONTENTS:	1. CDE7520 presentation display, 2. Remote control with batteries, 3. Quick start guide, 4. Power cables (1.5M), 5. HDMI-IN cable (3M) 6. Wall mount screw, 7. RS232 adapter
-------------------	--