




In close cooperation with Zebra, BARTEC has developed the MC 92 Mobile Computer for global use in potentially explosive areas, based on the successful MC 9000^{ex} range. The device range enables complex applications to be executed, processes to be simplified and productivity boosted. Whereas barcode scanners are used for the classic collection of data, the MC 92 also offers wireless data exchange and direct further processing of data in the field. The MCs are available with a choice of different barcode scanners in order to read 1D, PDF, 2D and DPM (Device Part Marking) barcodes. The selection permits a customised adjustment that also enables barcode scanning at a distance of up to 12 m (long range). In the RFID reader area, a UHF version is also available in addition to the LF and HF versions. The RFID reader is available as internal solution without barcode scanning. Three versions of operating system are available. These are the familiar environment of Windows[®] Embedded Handheld and Compact, as well as Android, the innovative, most commonly used operating system in the world. This means the user can easily adjust the devices to meet his requirements. The real time data exchange via Wi-Fi or Bluetooth is convenient, saves time and improves work processes. International approvals such as ATEX/IECEX and UL certificates as well as other national approvals such as for Brazil, South Africa, Russia etc., guarantee the worldwide use of the devices. The optimised power management and automatic shutdown via a motion sensor both guarantee long operating times.

Technical data

| | |
|--|---|
| Keypad design | 28 numeric keys 43 numeric keys with (F) function keys 53 alphanumeric keys 53 alphanumeric keys with layout for VT emulation |
| Display | 3.7" VGA colour display with 480 x 640 pixel touchscreen |
| Ambient temperature | -20 °C to +40 °C |
| Storage temperature | -40 °C to +70 °C |
| Charge temperature | 0 °C to +40 °C |
| Humidity | 5 % to 95 % (non-condensing) |
| Protection class (EN/IEC 60529) | IP 64 |
| Processor | TI OMAP 4430 dual-core [®] Processor/1 GHz |
| Memory | 1 GB/2 GB flash RAM/ROM optionally expanded with SD card (SDHC): up to 32 GB |
| Operating system | Windows [®] Embedded Handheld 6.5.3 Windows [®] Embedded Compact 7 (CE 7.0) Android 4.4.4 (Kit Kat) with Mobility Extension (Mx) from Zebra |
| Power supply | Lithium-ion battery B7-A2Z0-0025 mit 7.4 V/2400 mAh Battery can changed in the safe area. |
| Backup battery (installed in the device) | Ni-MH battery (rechargeable) 2.4 V/15 mAh |
| Interfaces | RS232 and USB over Single Slot Cradle Ethernet over Ethernet-enable Cradle |
| Application development | PSDK and EMDK for Windows and Android available from Zebra Support website |
| Software environment | All applications from Zebra and 3rd party providers (for Zebra MC9200) are compatible with the Version for use in a potentially explosive area of the MC 92NO ^{ex} -NI. Examples are Wavelink Terminal Emulation, tools and applications from Zebra. |
| Voice and audio | Integrated microphone, loudspeaker and 2.5 mm headset jack |

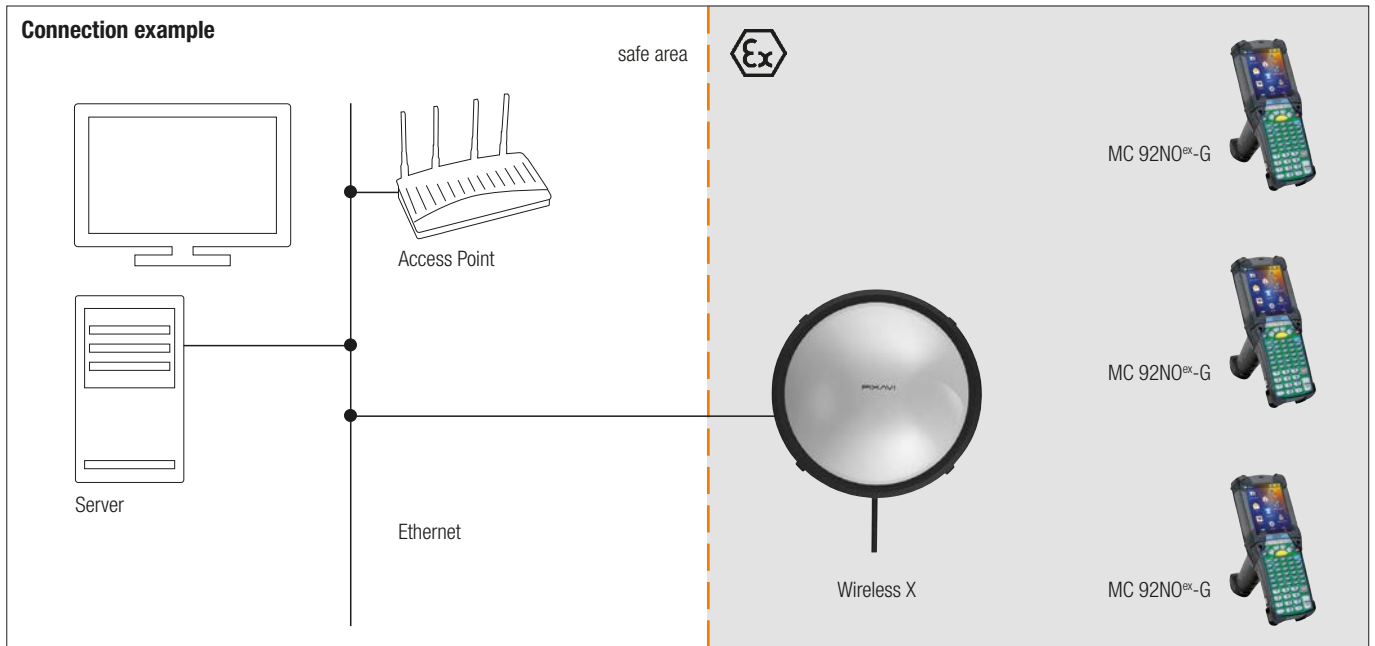

| | |
|-----------------------------------|--|
| Voice communication | Voice over IP Voice Directed Picking Tech Speech Pro approved, speech-based applications through third party provider VDP Clients (only with Windows operating system) Push-To-Talk, Workforce Connect PTT Express (client included) with headset and hands free mode, wired headset support |
| Radio standard | Win CE/WEH: IEEE 802.11 a/b/g/n/d/h/i Android: IEEE 802.11 a/b/g/n/d/h/i/k/r |
| Data rate | IEEE802.11a: up to 54 Mbit/Sec. IEEE802.11b: up to 11 Mbit/Sec. IEEE802.11g: up to 54 Mbit/Sec. IEEE802.11n: up to 65 Mbit/Sec. |
| Frequency range (country-related) | IEEE802.11a: 5 GHz IEEE802.11b: 2.4 GHz IEEE802.11g: 2.4 GHz IEEE802.11n: 2.4 GHz and 5 GHz |
| Security | WPA2 Enterprise, 802.1x; EAP-TLS; TTLS (CHAP, MS-CHAP, MS-CHAPv2, PAP or MD5); PEAP (TLS, MSCHAPv2, EAP-GTC); LEAP, EAP-FAST (TLS, MS-CHAPv2, EAP-GTC), WPA2/AES, CCX v4 and IPv6 |
| Output power | 210 mW |

| | |
|------------------------------|---|
| Antenna | Integrated in the device Note: The respective radio frequencies and usable channels depend on specific country regulations. |
| Bluetooth (WPAN) | Microsoft stack (preinstalled as standard) Bluetooth Version 2.1 with EDR Stonestreet stack (may be optionally activated) Bluetooth 4.0 Plus BLE or WBA Android devices: Bluetooth version 4.0 with low energy |
| Scope of delivery | 1 x MC 92NO ^{EX} , 1 x battery, 1 x wrist strap, 1 x stylus, 1 x manual |
| Optional accessories for use | in potentially explosive atmospheres: Battery SD card Screen protector Spare keypad (self-assembly) Holster Stylus Wrist strap outside potentially explosive atmospheres: Single Slot Cradle 4-slot Ethernet cradle Battery charger 4-slot charger Vehicle charger |



| Application areas | Features | Technology |
|--|---|---|
| Oil and gas industry Petrochemical and chemicals Pharmaceuticals industry Logistics | Most robust device in its class Integrated barcode or RFID reader (LF, HF, UHF) Optimised power management and long operating times | 3.7" VGA colour display with touchscreen, legible in sunlight High performance dual core processor "Hot swap" battery change (in the safe area) |

Available barcode scanning options

| Barcode options | | Reading range | Operating systems (available) | |
|--------------------|--|----------------------|-------------------------------|---------------|
| 1D barcodes | | | Windows CE/WEH | Android 4.4.4 |
| SE965-SR | 1D Standard Range Scan Engine | up to approx. 1.3 m | √ | √ |
| SE1524-LR | 1D Long Range Scan Engine | up to approx. 13.7 m | √ | √ |
| 1D/2D barcodes | | | | |
| SE4500-SR | 1D/2D Omnidirectional Imager Engine | up to approx. 60 cm | √ | √ |
| SE4750-SR | 1D/2D Omnidirectional Imager Engine | up to approx. 88 cm | √ | √ |
| SE4750-MR | 1D/2D Omnidirectional Middle Range Imager Engine | up to approx. 4.4 m | √ | √ |
| SE4600-LR | 1D/2D Omnidirectional Long Range Imager Engine | up to approx. 9.1 m | √ | - |
| DPM/1D/2D barcodes | | | | |
| SE4500-HD | DPM/1D/2D Imager Engine | up to approx. 28 cm | √ | - |

Detailed information about barcode scanning can be found in the user manual or "Integrator Guide" from Zebra Technologies. The maximum reading range of the various scan engines depends on the type of barcode used, the print quality and the module width (in mm).

| Supported 1D barcodes 1D symbol/codes | | Supported 2D barcodes (only supports the Imager version) 2D symbol/codes | | DPM Codes (1D-/2D Symbol/Codes) mounted on: |
|---------------------------------------|-----------------|--|----------------------|---|
| Code 11 | Code 39 | Aztec | Micro PDF-417 | Metal |
| Code 93 | Code 128 | Australian 4-state | Maxi Code | Plastic |
| Codabar | Coupon Code | Canadian 4-state | PDF-417 | Glass |
| Chinese 2 of 5 | Discrete 2 of 5 | Composite AB | QR Code | |
| Interleaved 2 of 5 | Trioptic 39 | Composite C | TLC39 | Method: |
| EAN-8 | EAN-13 | Data Matrix | UK 4-state | Dot peening |
| UPCA | UPCE | Dutch Kix | US Planet | Laser cut |
| UPC/EAN additions | MSI | Japanese 4-state | US Postnet | Cast |
| Webcode | RSS-14 | PDF-417 Macro | USPS 4-state (US4CB) | Punched |
| RSS Limited | RSS Expanded | (Macro) Micro PDF-417 | microQR | Moulded |



The MC 92NO^{ex}-G Mobile Computer with its handgrip is a robust unit for secure barcode scanning in potentially explosive areas. The scan trigger is ideally positioned on the handgrip, enabling barcodes to be conveniently scanned. The integrated radio module ensures real time data exchange with the host system. The MC 92NO^{ex}-G combines the advantages of the Microsoft or Android platform with the strengths of the TI OMAP 4430 dual core[®] processor with 1 GHz. The large, easy to read 3.7" VGA colour display is equipped with touchscreen technology. The device operates using the IEEE 802.11 radio standard.

Explosion protection

| | |
|--|--|
| Marking ATEX | Ex II 3G Ex ic IIC T6 Gc Ex II 3D Ex ic IIIB T80°C Dc IP 64 -20 °C ≤ T _a ≤ +50 °C |
| Certification | PTB 13 ATEX 2019X |
| Marking UL | Class I Div 1 Group C, D T4 Ex ia Class II Div 1 Group F, G Class III |
| Certification | UL File E321557 Vol. 1 Sec. 5 |
| Other approvals and certificates, see www.bartec.de | |

Technical data

| | |
|------------------------|-------------------------|
| Dimensions (H x W x D) | 231 mm x 91 mm x 196 mm |
| Weight (incl. battery) | approx. 780 g |

Options for data capture

| | |
|------------------|--|
| SE965-SR | 1D Scan Engine with Standard Range |
| SE1524-LR | 1D Scan Engine with extended Range |
| SE4500-SR | Omnidirectional 1D/2D Engine for Image Capture of 1D and 2D symbols |
| SE4750-SR | Omnidirectional 1D/2D Engine for Image Capture of 1D and 2D symbols |
| SE4750-MR | Omnidirectional 1D/2D Engine for Image Capture of 1D and 2D symbols with medium range |
| SE4600-LR | Omnidirectional 1D/2D Engine for Image Capture of 1D and 2D symbols with extended range |
| SE4500-HD | 1D/2D DPM Engine for Image Capture of several DPMs on metal, plastic and glass surfaces, including dot peening, laser etching, moulding, punching or fusing procedures |

Ordering information

| Barcode scanning | Code no. | Version | Code no. | Operating system | Code no. |
|---|----------|---|----------|--|----------|
| SE 965-SR 1D Standard Range Scan Engine | A | 28 keys, numeric | A | Windows [®] Embedded Handheld 6.5.3 | Q |
| SE 1524-LR 1D Long Range Scan Engine | J | | | | |
| SE 4500-SR 1D/2D Imager Engine | 3 | 43 keys, numeric with (F)-function keys | F | Windows [®] Embedded Compact 7 (CE 7.0) | Y |
| SE 4750-SR 1D/2D Imager Engine | L | | | | |
| SE 4750-MR 1D/2D Middle Range Imager | M | 53 keys, alphanumeric with layout for VT emulation* | E | Android 4.4.4 | A |
| SE 4500-HD** 1D/2D Imager DPM | 5 | | | | |
| SE 4600-LR** 1D/2D Long Range Imager | 9 | | G | | |

Complete order no. **B7-A2A4-0G** **0/SY** **A60**
MC 92NO^{ex}-G including Lithium-ion battery (1 piece).

* Emulation software is not included with delivery.
 ** only with Windows CE/WEH operating system available.

Note: You will find the accessories with order details on the accessories pages. Please insert correct code. Technical data subject to change without notice.



The MC 92NO^{ex}-K Mobile Computer is a robust unit for secure barcode scanning in potentially explosive atmospheres. The scan trigger is positioned so that barcodes can be scanned with the greatest convenience. The integrated radio module ensures real time data exchange with the host system. The MC 92NO^{ex}-K combines the advantages of the Microsoft or Android platform with the strengths of the TI OMAP 4430 dual core[®] processor with 1 GHz. The large, easy to read 3.7" VGA colour display is equipped with touchscreen technology. The device operates using the IEEE 802.11 radio standard.

Explosion protection

| | |
|--|--|
| Marking ATEX | Ex II 3G Ex ic IIC T6 Gc Ex II 3D Ex ic IIIB T80°C Dc IP 64 -20 °C ≤ T _a ≤ +50 °C |
| Certification | EPS 14 ATEX 1 782 X |
| Marking UL | Class I Div 2 Group A, B, C, D T6 Class II Div 2 Group F, G Class III |
| Certification | UL File E321557 Vol. 1 Sec. 5 |
| Other approvals and certificates, see www.bartec.de | |

Technical data

| | |
|------------------------|------------------------|
| Dimensions (H x W x D) | 231 mm x 91 mm x 59 mm |
| Weight (incl. battery) | approx. 640 g |

Options for data capture

| | |
|------------------|--|
| SE965-SR | 1D Scan Engine with Standard Range |
| SE4500-SR | Omnidirectional 1D/2D Engine for Image Capture of 1D and 2D symbols |
| SE4500-HD | 1D/2D DPM Engine for Image Capture of several DPMs on metal, plastic and glass surfaces, including dot peening, laser etching, moulding, punching or fusing procedures |

Ordering information

| Barcode scanning | Code no. | Version | Code no. | Operating system | Code no. |
|---|----------|---|----------|--|----------|
| SE 965-SR 1D Standard Range Scan Engine | A | 28 keys, numeric | A | Windows [®] Embedded Handheld 6.5.3 | Q |
| SE 4500-SR 1D/2D Imager Engine | 3 | 43 keys, numeric with (F)-function keys | F | Windows [®] Embedded Compact 7 (CE 7.0) | Y |
| | | 53 keys, alphanumeric | E | | |
| SE 4500-HD** 1D/2D Imager DPM | 5 | 53 keys, alphanumeric with layout for VT emulation* | G | Android 4.4.4 | A |

Complete order no. **B7-A2A4-OK** **0/SY** **A600**
MC 92NO^{ex}-K including Lithium-ion battery (1 piece).

* Emulation software is not included with delivery.

** only available with Windows CE/WEH operating system

Note: You will find the accessories with order details on the accessories pages. Please insert correct code. Technical data subject to change without notice.



The unique concept enables barcode scanning and RFID technology to be combined in this device. Thanks to the modular keypad and colour display, data can be processed directly on the Mobile Computer. The data are transmitted to other areas of the company via WiFi or Bluetooth, so that the data are available for further processing in real time. As software for the individual application development, BARTEC offers a demo version in Open Source and an SDK file. The SDK file is available for the programming language C# and includes all necessary resources for specific application development within Windows® operating systems. The Open Source demo is used firstly to demonstrate the reading and writing of RFID tags. It also serves as a good basis for the application developer with respect to customised programming of the readers. The MC 92NO^{ex}-NI can be retrofitted in the factory with the RFID option. It cannot be retrofitted by the customer.

Explosion protection

| | |
|--|--|
| Marking ATEX | Ⓔ II 3G Ex ic IIC T4 Gc Ⓔ II 3D Ex ic IIIB T130 °C Dc IP 64 -20 °C ≤ T _a ≤ +50 °C Ⓔ II 3G Ex ic IIB T4 Gc Ⓔ II 3D Ex ic IIIB T130 °C Dc IP 64 -20 °C ≤ T _a ≤ +50 °C (with mounted antenna) |
| Certification | EPS 14 ATEX 1 782 X |
| Marking UL | Class I Div 2 Group A, B, C, D T4 Class II Div 2 Group F, G Class III |
| Certification | UL File E321557 Vol. 1 Sec. 5 |
| Other approvals and certificates, see www.bartec.de | |

Technical data

| | | |
|---|--|--------------------------|
| Dimensions (H x W x D) | MC 92NO ^{ex} -G with internal RFID | 234 mm x 91 mm x 196 mm |
| | with internal RFID + mounted antenna | 273 mm x 111 mm x 196 mm |
| Weight (including battery, depending on version and configuration) | MC 92NO ^{ex} -K with internal RFID | 234 mm x 91 mm x 59 mm |
| | with internal RFID + mounted antenna | 254 mm x 111 mm x 117 mm |
| Operating system | MC 92NO ^{ex} -G with internal RFID | approx. 780 g |
| | with internal RFID + mounted antenna | approx. 830 g |
| | MC 92NO ^{ex} -K with internal RFID | approx. 640 g |
| | with internal RFID + mounted antenna | approx. 690 g |

Note

Android 4.4.4 (KitKat) and Windows® Embedded Compact 7 (CE 7.0) are not supported. Combination with the scan engine is not supported.



LF reader

| | |
|---------------------|---|
| Supported standards | HITAG S256, HITAG S 2 kbit, HITAG 1, HITAG 2, Q5, ATA5567, EM4305, HDX - RO, HDX (Multipage), EM4xxx (UNIQUE), FDX-B, BDE, ISO 117845, ISO Animal, EM 4450/4550, EM4xxx (UNIQUE), FDX-B, BDE, ISO 11784/5, ISO Animal |
| Read/write range | approx. 5 cm |
| Antenna | Ferrite antenna or antenna with air coil |
| Frequency range | 125/134 kHz |

HF reader

| | |
|--|--|
| Supported standards | HF ISO 15693 e.g. I-Code SLI, Tag-IT HFI, my-d vicinity, STM LRI512 HF ISO 14443 e.g. mifare, mifare Ultra Light, my-d proximity, I-Code 1 (optional) |
| Read/write range HF ISO 15693 HF ISO 14443 | approx. 5 cm to 6 cm approx. 4 cm to 5 cm (with tag in credit card format) |
| Antenna | integrated |
| Frequency range | 13.56 MHz |

UHF reader

| | |
|---------------------|---|
| Supported standards | EPC Class 1 Gen 2 tag |
| Read/write range | approx. 30 cm to 50 cm |
| Antenna | integrated |
| Frequency range | Europe (EU) 865.6 to 867.5 MHz (EN 302 208) USA (US) 902.0 to 928.0 MHz (FCC CFR 47 Part 15.247) |

UHF reader with mounted antenna

| | |
|---------------------|---|
| Supported standards | EPC Class 1 Gen 2 tag |
| Read/write range | approx. 150 cm |
| Antenna | external (UPM Raflatac) |
| Frequency range | Europe (EU) 865.6 to 867.5 MHz (EN 302 208) USA (US) 902.0 to 928.0 MHz (FCC CFR 47 Part 15.247) |

Ordering information

| RFID internal options (without barcode scanning option) | Code no. | Version | Code no. |
|---|----------|---|----------|
| RFID LF reader | 1 | 28 keys, numeric | A |
| RFID HF reader | 3 | 43 keys, numeric with (F)-function keys | F |
| RFID UHF (US) reader | A | | |
| RFID UHF (EU) reader | B | 53 keys, alphanumeric | E |
| RFID UHF (US) Reader with mounted antenna | C | 53 keys, alphanumeric with layout for VT emulation* | G |
| RFID UHF (EU) Reader with mounted antenna | D | | |

Complete order no.

MC 92NO^{ex} including Lithium-ion battery (1 piece).

* Emulation software is not included with delivery.

Version MC 92NO^{ex}-G B7-A2A4-RG0 /SY QA600
Version MC 92NO^{ex}-K B7-A2A4-RKO /SY QA600

Note: You will find the accessories with order details on the accessories pages.
Please insert correct code. Technical data subject to change without notice.

Ordering information



Accessories for use in potentially explosive atmospheres

| Illustration | Description | Order no. |
|---|--|---|
|  | <p>Battery</p> <ul style="list-style-type: none"> - Lithium-ion battery - 7.4 V/2400 mAh - rechargeable - can be changed in the safe area - approved in combination with the MC 92NO^{ex} series - compatible with MC 9090^{ex} series <p>Version: MC 92NO^{ex}-NI Type B7-A2A4-xxxx/xxxxxxxx approved for: ATEX/IECEx Zone 2 and Zone 22 UL Class I Div 2, UL Class II Div 2, UL Class III</p> | B7-A2Z0-0025 |
|  | <p>SD card*</p> <ul style="list-style-type: none"> - based on the industrial version of ATP - approved in combination with MC 92NO^{ex} series - compatible with the MC 9090^{ex} series - can be changed in the safe area <p>* SD cards are not laid down in the certificate. The customer can choose any SD card.</p> <p>Industrial grade SD cards recommended by BARTEC with</p> <ul style="list-style-type: none"> - 2 GB (compatible with MC 9090^{ex} series) - 4 GB (compatible with MC 9090^{ex} series) - 8 GB - 16 GB - 32 GB | <p>17-28BE-F006/0003 17-28BE-F006/0004 17-28BE-F006/0005 17-28BE-F006/0006 17-28BE-F006/0007</p> |
|  | <p>Alternative keypad with green overlay</p> <ul style="list-style-type: none"> - approved in combination with the MC 92NO^{ex} series - compatible with the MC 9090^{ex} series - can be changed in the safe area <p>Suitable for use in the potentially explosive area</p> <ul style="list-style-type: none"> - ATEX/IECEx Zone 2 and Zone 22 - UL Class I Div 2, UL Class II Div 2, UL Class III <p>Keypad variations</p> <ul style="list-style-type: none"> - Keypad with 28 numeric keys - Keypad with 43 numeric keys, (F) function keys - Keypad with 53 alphanumeric keys - Keypad with 53 alphanumeric keys for VT emulation* <p>* Emulation software is not preinstalled on the devices.</p> | <p>05-0080-0577 05-0080-0578 05-0080-0579 05-0080-0580</p> |
|  | <p>Screen protector**</p> <ul style="list-style-type: none"> - approved in combination with MC 92NO^{ex} series - compatible with MC 9090^{ex} series - can be changed in the safe area - 5 pcs per package <p>Suitable for use in the potentially explosive area</p> <ul style="list-style-type: none"> - ATEX/IECEx Zone 2 und 22 - UL Class I Div 2, UL Class II Div 2, UL Class III <p>** Only use screen protectors that have been tested by BARTEC and/or have been certified for this purpose.</p> | 17-A1Z0-0004 |




Ordering information

Accessories for use in potentially explosive atmospheres

| Illustration | Description | Order no. |
|---|---|--|
| | <p>Leather holster</p> <ul style="list-style-type: none"> - approved in combination with the MC 92NO^{ex} series - compatible with the MC 9090^{ex} series - can be changed in the safe area <p>Suitable for use in the potentially explosive area</p> <ul style="list-style-type: none"> - ATEX/IECEX Zone 2 and 22 - UL Class I Div 2, UL Class II Div 2, UL Class III <p>for MC 92NO^{ex}-K RFID* (Type B7-A2Ax-RKxx/xxxxxxx)</p> <p>for MC 92NO^{ex}-G RFID* (Type B7-A2Ax-RGxx/xxxxxxx)</p> <p>for MC 92NO^{ex}-G and MC 92NO^{ex}-K (Type B7-A2Ax-0xxx/xxxxxxx) including belt clip/rotating part</p> <p>* We recommend the use of a shoulder strap to wear and fasten the holster.</p> | <p>03-9809-0023</p> <p>03-9809-0024</p> <p>03-9809-0026</p> |
|  | <p>Belt clip/rotating part for holster</p> | 03-9809-0027 |
|  | <p>Shoulder strap suitable for leather carry cases for the Agile tablet PC series and MC 92 mobile computers</p> <ul style="list-style-type: none"> - ergonomic and soft shoulder pad - adjustable strap length | 03-9829-0091 |
|  | <p>Stylus</p> <p>Suitable for use in the potentially explosive area:</p> <ul style="list-style-type: none"> - ATEX/IECEX Zone 2 and 22 - UL Class I Div 2, UL Class II Div 2, UL Class III | |
|  | <p>for MC 92NO^{ex}-K</p> <ul style="list-style-type: none"> - 10 pcs per package - colour: yellow - 3 pcs per package of spare rubber loops - colour: grey | <p>03-9849-0069</p> <p>03-9849-0039</p> |
|  | <p>for MC 92NO^{ex}-G</p> <ul style="list-style-type: none"> - 3 pcs per package - colour: grey - 10 pcs per package - colour: yellow | <p>03-9849-0043</p> <p>03-9849-0070</p> |
| | <p>available individual parts</p> <ul style="list-style-type: none"> - 3 pcs per package of spare rubber loops | 03-9849-0047 |
|  | <p>Wrist strap</p> <p>Suitable for use in the potentially explosive area:</p> <ul style="list-style-type: none"> - ATEX/IECEX Zone 2 and 22 - UL Class I Div 2, UL Class II Div 2, UL Class III | |
|  | <p>Hand strap for MC 92NO^{ex}-G</p> <ul style="list-style-type: none"> - 3 pcs per package | 03-9849-0068 |
|  | <p>Holder for hand strap for MC 92NO^{ex}-K</p> <ul style="list-style-type: none"> - 3 pcs per package - 1 3 pcs per package | <p>03-9849-0067</p> <p>03-9849-0056</p> |

Ordering information

Accessories for use outside potentially explosive atmospheres

| Illustration | Description | Order no. |
|---|--|----------------------------|
|  | <p>4-slot battery charger</p> | |
| | <ul style="list-style-type: none"> - to charge a maximum of 4 batteries | |
| | <p>Please order the individual parts required separately:</p> | |
| | <ul style="list-style-type: none"> - 4-slot battery charger | <p>03-9849-0062</p> |
| | <ul style="list-style-type: none"> - Power pack for 4-slot battery charger: | <p>03-9911-0043</p> |
| | <ul style="list-style-type: none"> AC 100 - 240 V, DC 15 V, 5 A | |
| | <ul style="list-style-type: none"> - DC connecting cable for power supply from the power pack to the 4-slot battery charger | <p>03-9919-0030</p> |
| | <p>AC power cable - 3-wire – for the specific country</p> | |
| | <ul style="list-style-type: none"> - AC power cable (EU) - 3-wire | <p>03-9609-0011</p> |
| | <ul style="list-style-type: none"> IEC connector IEC-60320 C13 socket to C14 plug | |
| <ul style="list-style-type: none"> - AC power cable (US) - 3-wire | <p>03-9609-0021</p> | |
| <ul style="list-style-type: none"> IEC connector IEC-60320 C13 socket to NEMA 5-15P USA plug | | |
| <hr/> <p>Car charging options</p> | | |
| <ul style="list-style-type: none"> - to charge a Mobile Computer | | |
| <ul style="list-style-type: none"> - car charging cable - 12 V, requires cable adapter for car charging cable | <p>03-9914-0008</p> | |
| <ul style="list-style-type: none"> - car charging cable - 24 V, requires cable adapter for car charging cable | <p>03-9914-0009</p> | |
| <p>Please order the individual parts required separately:</p> | | |
| <ul style="list-style-type: none"> - Cable adapter for car charging cable | <p>03-9919-0019</p> | |
| <p>Further accessories for the MC 9200 range are available from Zebra Homepage: https://www.zebra.com/de/de.html</p> | | |
| <p>Accessories page: https://www.zebra.com/gb/en/products/accessories/mobile-computer.html</p> | | |