

K27 II

INTELLIGENT SELF-CHECKOUT ORDERING KIOSK



Save on labor costs, reduce wait times, and increase the average order size with the K27 II self-order kiosk for use in quick service restaurants and other hospitality and retail venues.


K27 II is a space-saving kiosk solution that can be easily customized to meet your business' and branding requirements. Choose between a broad selection of peripherals such as 2D bar code scanner, camera, RFID card reader, thermal printer with the option of adding more modules later. Select between floor stand and wall mount with optional double-sided operation. In addition, the color and shape of the enclosure can be customized to match your brand.

SPECIAL FEATURES


- Large 27-inch capacitive touch display
- 1920 x 1080 screen resolution
- Fanless with high performance Intel CPU and high speed M.2 SATA SSD
- ARM Rockchip RK3399, Android 11 Operating System
- Select between many different integrated peripherals such as RFID, bar code scanner, EMV terminal, printer, camera, ADA keypad, etc)
- Easily upgrade the functionality with more peripherals
- Modular design makes maintenance and repairs more cost-efficient
- Possible to customize the the color and shape of the enclosure

K27 II


For an optimized workflow

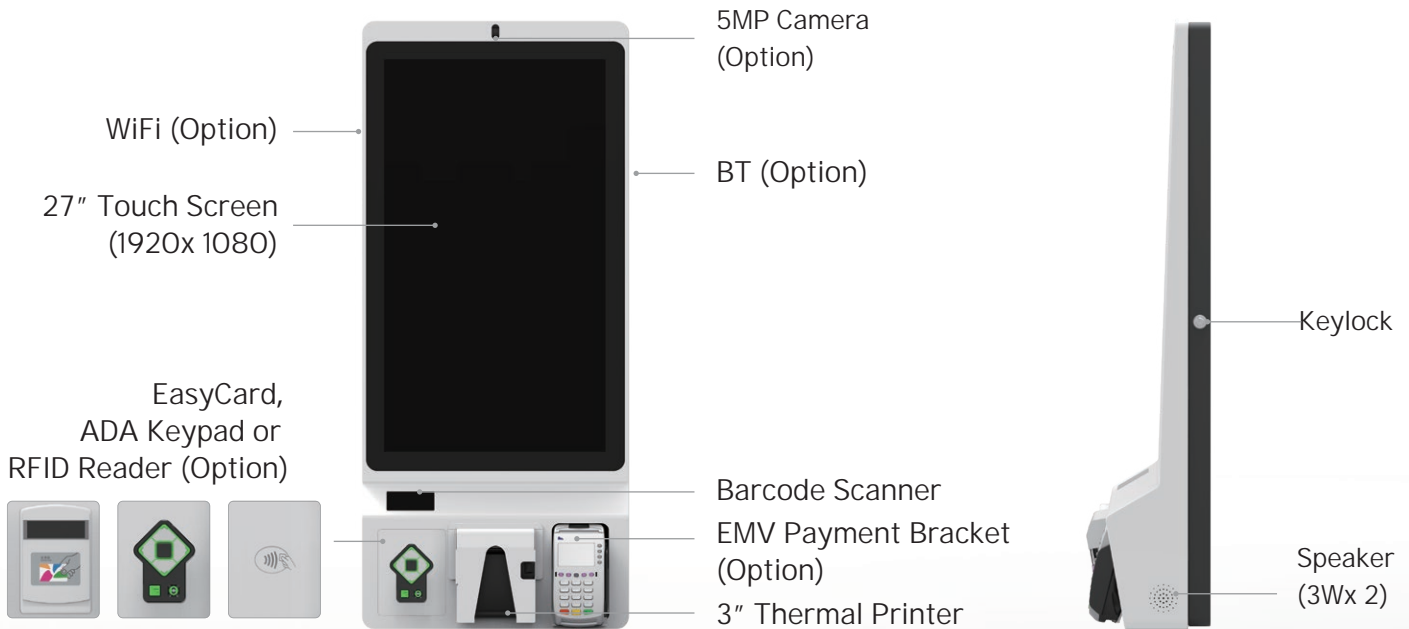


Base Options

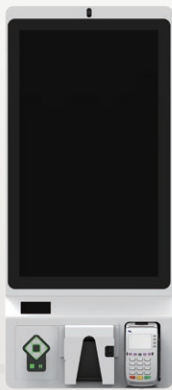

Wall Mounted

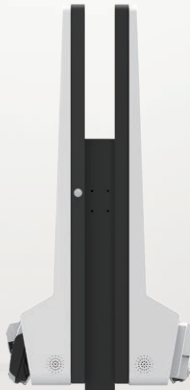

Double Sided

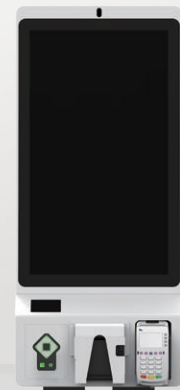

Floor Standing



K27 II

K27 II Kiosk					
Item					
Display	27" Resolution 1920x1080(300 nits) 27" Resolution 1920x1080(650 nits) Options				
Touch	PCAP touch				
CPU	Intel® Core™ i3-1215UE (Alder lake-P)	Intel® Celeron® J6412 (Elkhart Lake)	Intel® Core™ i3-7100U (KABYLAKE-U)	Intel Celeron J3455 (Apollo Lake)	Rockchip RK3399
	Intel® Core™ i5-1245UE, vPro (Alder lake-P)		Intel® Core™ i5-7300U (KABYLAKE-U)		
Memory	DDR4 4GB, 8GB, 16GB, 32G	DDR4 4GB, 8GB, 16GB	DDR4 4GB, 8GB, 16GB	DDR3L 4GB, 8GB	LDDR4 4GB
Storage	M.2 PCIe SSD: 128G / 256G / 512G	M.2 PCIe SSD: 128G / 256G	M.2 PCIe SSD: 128G / 256G	M.2 SATA SSD: 128G / 256G	Emmc32GB + 1x Micro SD Card Slot (up to 128GB)
External I/O Interface	1 x Gigabit Ethernet				
	1 x AC Male Power Socket				
	1 x Power switch Button				
Speaker	2 x Speaker 3W				
Printer	3" Thermal printer				
Optional Peripheral	2D Bar Code Scanner				
	EMV Terminal Bracket				
	5M Camera				
	RFID Reader				
	ADA keypad				
	Floor stand (including wheels & handle)				
	Wallmount bracket				
WIFI/BT(option)	IEEE 802.11 a/b/g/n/acR2/axR2, BT5.2		IEEE 802.11a/b/g/n/ac , BT 4.2		
Operation System	1. Windows 11 IoT Enterprise GAC (64bit) 2. Windows 10 IoT Enterprise (64bit) 3. Linux (Ubuntu 22.04)	1. Windows 11 IoT Enterprise GAC (64bit) 2. Windows 10 IoT Enterprise (64bit) 3. Linux (Ubuntu 22.04)	1. Windows 10 IoT Enterprise (64bit) 2. Linux (Ubuntu 18.04) 3. Debian 9.12 x64 (Kernel 4.9.x)	1. Windows 10 IoT Enterprise (64bit) 2. Linux (Ubuntu 18.04) 3. CentOS 7.8 x64 4. Debian 9.12 x64 (Kernel 4.9.x)	1. Android 9.0 2. Android 11
SW	1. Intel V-Pro (i5 CPU only) 2. S/W TPM 2.0 (BIOS)	S/W TPM 2.0 (BIOS)	1. Intel V-Pro (i5 CPU only) 2. S/W TPM 2.0 (BIOS)	S/W TPM 2.0 (BIOS)	N/A
Power Adaptor	AC-In 100-240V / DC-Out 12V, 120W				AC-In 100-240V / DC-Out 12V, 90W
Reliability	System Operating Temperature: 0-40°C				
	System Humidity: 15% ~ 80%				
	Storage Temperature: -20-60°C				
Dimensions	415.2 (W) x 945.6 (H) x 163.19 (D) mm				
	550 (W) x 1900 (H) x 610 (D) mm				
Weight	Wall mount: 21Kg / Floor Stand: 64 Kg				

*Specification is subject to change without prior notice



CARE . TRUST . RESPONSIBILITY

TAIWAN E-mail:sales@partner.com.tw
 USA E-mail:sales@partnertechcorp.com
 EUROPE E-mail:info@partner-tech.eu
 UK E-mail:sales@partnertechuk.com
 CHINA E-mail:sales@partnertech.com.cn

MIDDLE EAST E-mail:info@partnertechme.com
 AUSTRALIA E-mail:sales@partner-tech.com.au
 SOUTH EAST ASIA E-mail:ptse@partner.com.tw
 JAPAN E-mail:sales-jp@partner.com.tw